


*Concept*

**WIRE INDUSTRIES**

For best results

Two prongs should point to the left

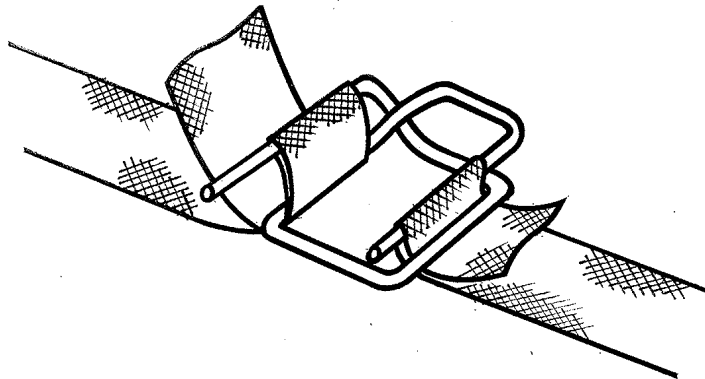

For BEST results  
tensioner should be on  
this side

## **WIRE BUCKLE INSTRUCTIONS**

1. Make loop on the end of the strap with the end of the strap facing away.
2. Hold buckle with the two legs on the top
3. Place the strap with loop through the centre of the buckle from underneath with the strap end facing away from the centre
4. Bend strap and push over the leg so that the leg goes through the loop
5. Place strap around product to be strapped and then repeat above instructions for the other end of strap making sure strap end facing away from centre.
6. Pull strap to tension strap. Strap should slide through buckle.